

MODEL	CHOTA BHEEM (30KW)		BHEEM (60KW-240KW)		DORA	
					7KW	11KW/22KW
Input Type	3-Phase	Input Type	3-Phase	Input Type	1-Phase	3-Phase
Input Wiring Scheme	3P+N+PE	Input Wiring Scheme	3P+N+PE	Input Wiring Scheme	1P+N+PE	3P+N+PE
Rated Voltage	400VAC±15%	Rated Voltage	400VAC±15%	Rated Voltage	230VAC±10%	400VAC±10%
Max. THDi	5%	Max. THDi	5%	Grid Frequency	50Hz or 60Hz	50Hz or 60Hz
Min. Power Factor	0.98	Min. Power Factor	0.98	Output Voltage	230VAC±10%	400VAC±10%
Grid Frequency	50Hz or 60Hz	Grid Frequency	50Hz or 60Hz	Max. Current	16A	16A/32A
Output Voltage	150-1000VDC	Output Voltage	150-1000VDC	Rated Power	7kW	11kW/22kW
Max. Current	100A	Max. Current	150A-200A	Charge Connector	Type 2 Plug	
Rated Power	30kW	Rated Power	60kW-240kW	LED Indicator	Green/Blue/Red,Progress Indicator	
Charge Connector	CCS Combo 2 Plug	Charge Connector	CCS Combo 2 Plug	LCD Display	4.3 inch Touch Color Screen	
LED Indicator	Green/Blue/Red,Progress Indicator	LED Indicator	Green/Blue/Red,Progress Indicator	RFID Reader	ISO/IEC 14443 RFID Card Reader	
LCD Display	4.3 inch Touch Color Screen	LCD Display	7 inch Touch Color Screen	Start Mode	Plug&Charge/RFID Card/APP Bluetooth / Wi-Fi /Cellular(Optional) / Ethernet(Optional)	
RFID Reader	ISO/IEC 14443 RFID Card Reader	RFID Reader	ISO/IEC 14443 RFID Card Reader	Backend	OCPP-1.6J	
Start Mode	RFID Card or APP	Start Mode	RFID Card or APP	Charging protocol	OCPP-1.6J	
Backend	Ethernet/ WiFi/Bluetooth, Optional: Cellular	Backend	Ethernet/ WiFi/Bluetooth, Optional: Cellular	Energy Meter	Embedded Meter Circuit Component With 1% accuracy	
Charging protocol	OCPP-1.6J	Charging protocol	OCPP-1.6J	Residual Current Device	DC6mA+Type A AC 30mA	
Energy Meter	Meter With 1% Accuracy	Energy Meter	Meter With 1% Accuracy	Ingress Protection	IP55	
Residual Current Device	Yes	Residual Current Device	Yes	Impact Protection	IK10	
Internal FUSE	Yes	Internal FUSE	Yes	Cooling method	Natural Cooling	
Ingress Protection	IP54	Ingress Protection	IP54	Electrical Protection	Over/Under Voltage Protection,Over Current Protection, Short Circuit Protection, Over/Under Temperature Protection,Lightning Protection,Ground Protection	
Impact Protection	IK10	Impact Protection	IK10	Certification	CE	
Cooling method	Fan Cooling	Cooling method	Fan Cooling	Certification and Conformity	IEC61851-1,IEC62196-1/-2,SAE J1772	
Max. Operating Noise Level	65dB	Max. Operating Noise Level	65dB	Mounting	Wall-mount/Pole-mount	
Electrical Protection	Over/Under Voltage Protection,Over Current Protection, Short Circuit Protection, Over/Under Temperature Protection,Lightning Protection,Ground Protection	Electrical Protection	Over/Under Voltage Protection,Over Current Protection, Short Circuit Protection, Over/Under Temperature Protection,Lightning Protection,Ground Protection	Storage Temperature	-40°C - +85°C	
Certification	CE	Certification	CE	Operating Temperature	-30°C - +50°C	
Certification and Conformity	IEC62196-1/-3,IEC 61851-1/-23/-24	Certification and Conformity	IEC62196-1/-3,IEC 61851-1/-23/-24	Max. Operating Humidity	95% Non-condensing	
Mounting	Wall-mount/Pole-mount	Mounting	Free-standing Cabinet	Max. operating altitude	2000m	
Storage Temperature	-40°C - +85°C	Storage Temperature	-40°C - +85°C	Product Dimension	270mm*135mm*365mm(W*D*H)	
Operating Temperature	-40°C - +75°C	Operating Temperature	-40°C - +75°C	Package Dimension	325mm*260mm*500mm(W*D*H)	
Max. Operating Humidity	95% Non-condensing	Max. Operating Humidity	95% Non-condensing	Weight	5kg(Net) / 6kg(Gross)	
Max. operating altitude	2000m	Max. operating altitude	2000m	Accessory	Cable holder,Pedestal(Optional)	
Product Dimension	640mm*160mm*550mm(W*D*H)	Product Dimension	750mm*750mm*1900mm(W*D*H)			
Package Dimension	750mm*330mm*750mm(W*D*H)	Package Dimension	1000mm*920mm*2100mm(W*D*H)			
Weight	55 kg(Net) / 61 kg(Gross)	Package Dimension	1000mm*920mm*2100mm(W*D*H)			
Accessory	Cable holder,Pedestal(Optional)	Weight	257-366kg(Net)/276-386kg(Gross)			

MODEL

**TOM
7KW**


&

**JERRY
3.5KW**

Facebook, Instagram, Twitter, Messenger icons
@HELIOSEVC

HELIOS
ELECTRIC VEHICLE CHARGER SOLUTIONS PRIVATE LIMITED

Input Type	1-Phase	
Input Wiring Scheme	P+N+PE	
Rated Voltage	220VAC±10%	
Max. THDi	5%	
Min. Power Factor	0.98	
Grid Frequency	50Hz	
Rated. Current	32A(Adj.16-26-32)A	16A(Adj.8-10-13-16)A
Rated Power	7kW	3.5kW
LED Indicator	Green/Blue/Red,Progress Indicator	
Residual Current Device	Yes	
Internal FUSE	Yes	
Level of Protection	IC-CPD IP67, Vehicle Connector IP54	
Cooling method	Natural Cooling	
Certification	CE	
Mounting	Portable/wall/poll Mount	
Storage Temperature	-40°C - +80°C	
Operating Temperature	-40°C - +50°C	
Max. Operating Humidity	95RH 5%	
Weight	2.1kg	
Accessory	Cable holder, Pedestal(Optional)	

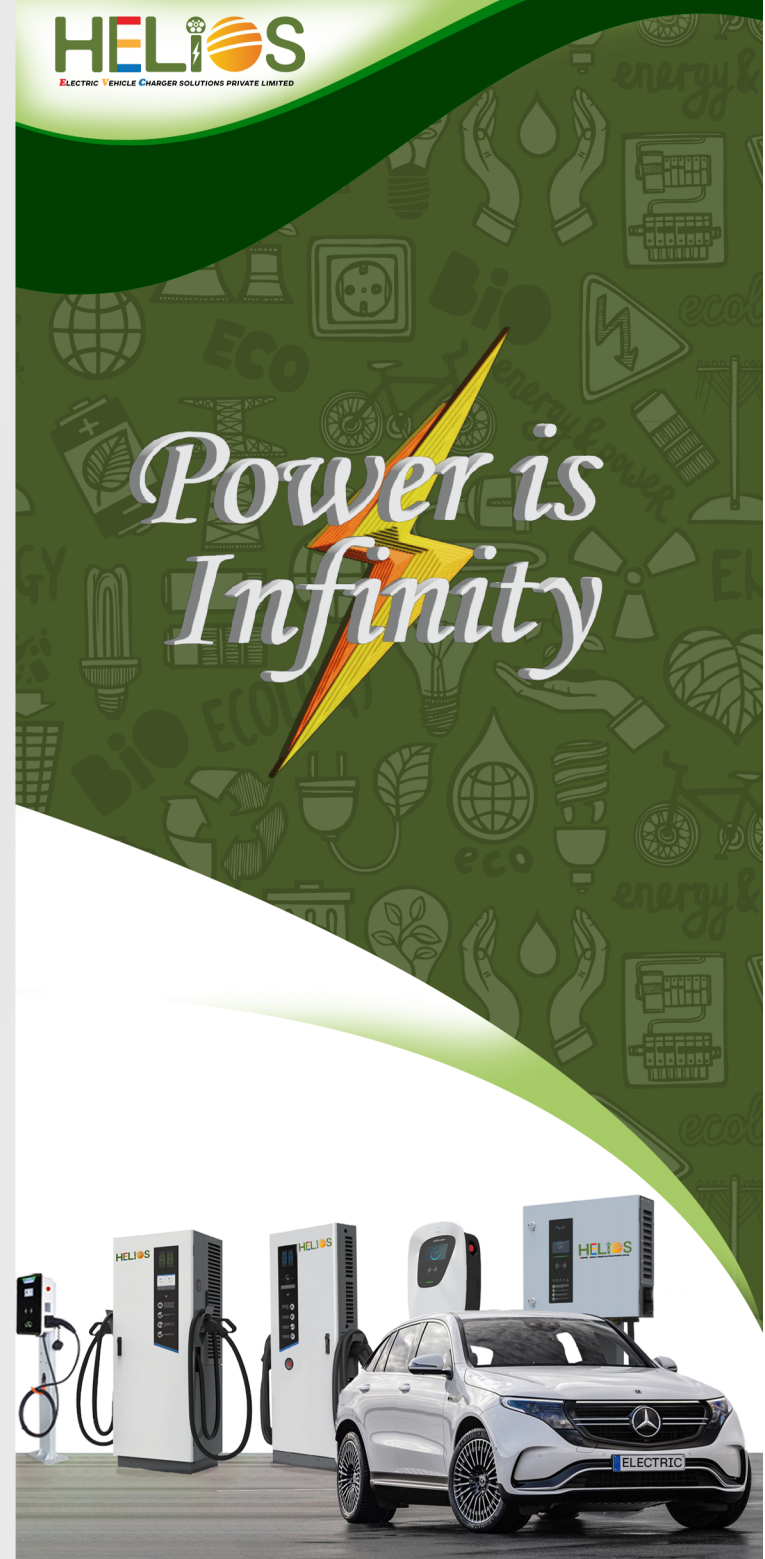

Power is Infinity

HELIOS
Power is Infinity

Scan to Reach us

